



VERSION	MODIFY	DATE

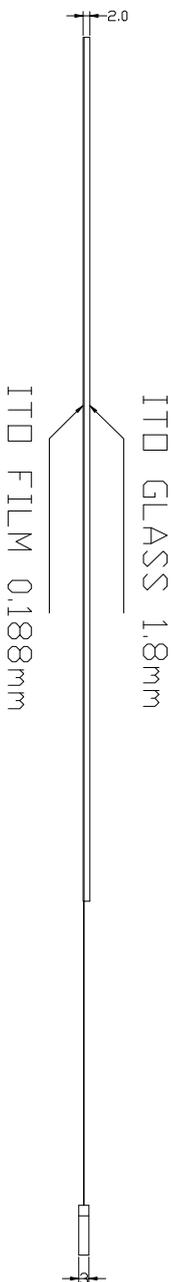

PIN	OUT
1	A
2	B
3	E
4	C
5	D

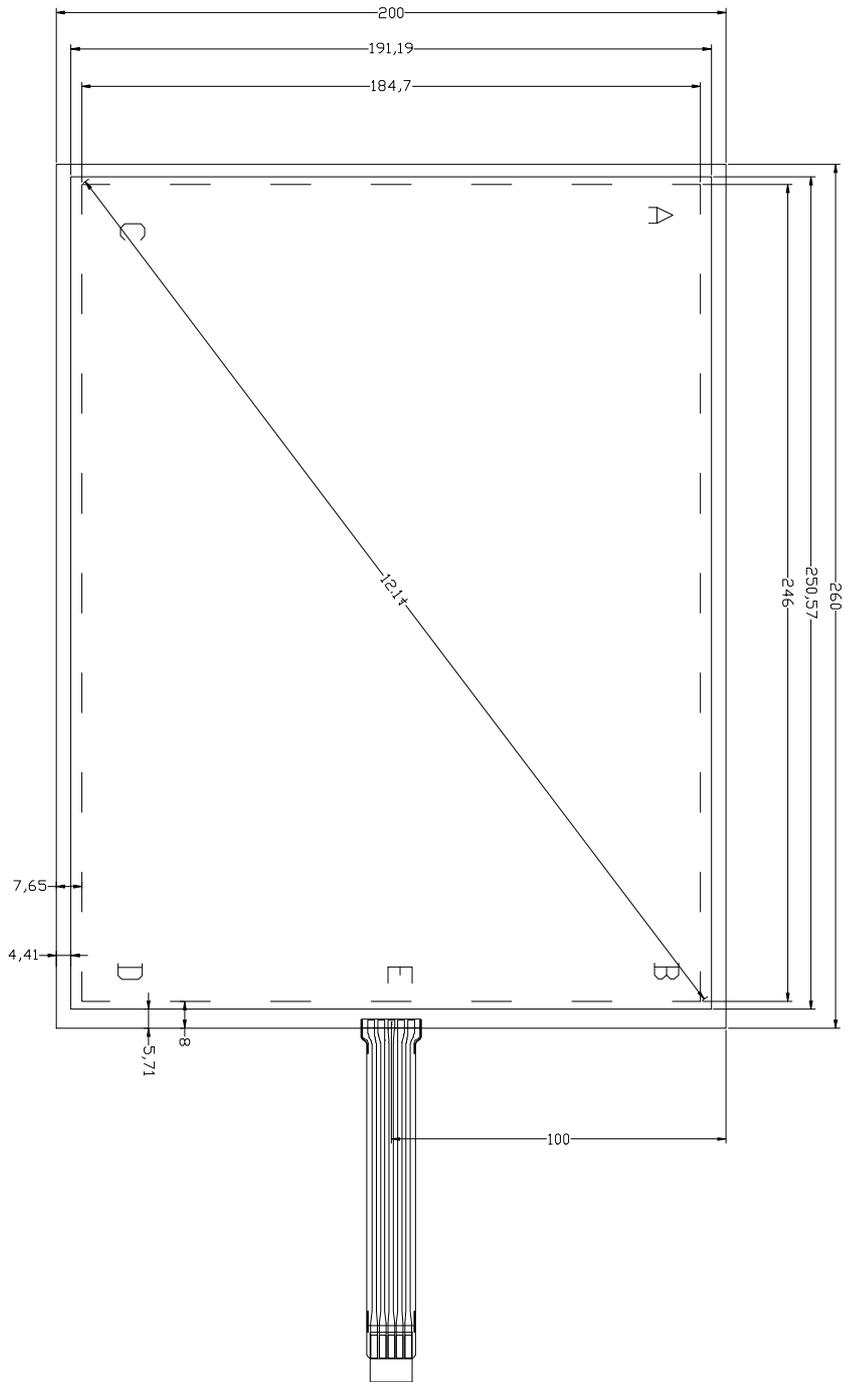

- Notes:
1. Type: Film to Glass
  2. Operation Temperature:  $-10^{\circ}\text{C} \sim 60^{\circ}\text{C}$   
Storage Temperature:  $-20^{\circ}\text{C} \sim 70^{\circ}\text{C}$
  3. Hitting Life:  $>35,000,000$  times  
Writing Life:  $>5,000,000$  times
  4. Linearity:  $\leq 3.0\%$
  5. Transmittance:  $\geq 80\%$
  6. Tail Tye: FPC By Gold Plated
  7. All Tolerance Without Marked:  $\pm 0.3$

深圳市良展光电有限公司

MODEL NO. TP-5W12101

DRAWN:

DATE:

VERSION: 1.0

UNIT: MM

TOLERANCE:  $\pm 0.2$

SCALE: 1:1

REV: